

## EVOLUTION/BR

### ES

Montaje: Adosable.

Fuente de luz: Módulos lineales LED SMD.  
Temperatura de color 4000K.  
Disponible, 3000K, 6000K.

Sistema óptico: Difusor doble parabólico brillante. Apertura de luz 80°. Disponible, difusor doble parabólico mate "EVOLUTION/MR".

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico. PF>0,95. Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3h).

Materiales: Cuerpo: Acero de alta resistencia a la torsión y espesores mínimos garantizados de 0,6mm, según Normas ENEC-10 y VDE. Difusor: Parabólico de aluminio brillante.

Acabado: Color blanco RAL 9003 (estándar). Otros colores RAL disponibles bajo consulta.



### EN

Mounting: Surface.

Light source: LED linear modules SMD.  
Temperature color 4000K.  
Available, 3000K, 6000K.

Optical system: Double parabolic bright diffuser. Beam angle 80°. Available, double parabolic mat louvre "EVOLUTION/MR".

Light distribution: Direct.


Electrical equipment: Electronic control gear. PF>0,95. Available, dimmable 1-10V or DALI and/or emergency kit (1-3h).

Materials: Body: Steel sheet 0.6mm thick, white lacquered with anti-corrosive treatment according to ENEC-10 and VDE standards. Diffuser: Double parabolic Bright aluminum.



Surface finish: Body: Standard color white RAL 9003. Other RAL colors under request.




EVOLUTION/BR-L-40W

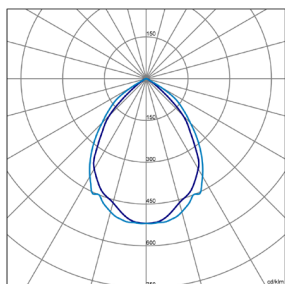


EVOLUTION/BR-M

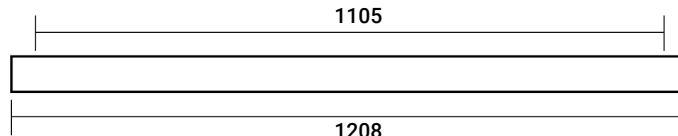


EVOLUTION/BR-L

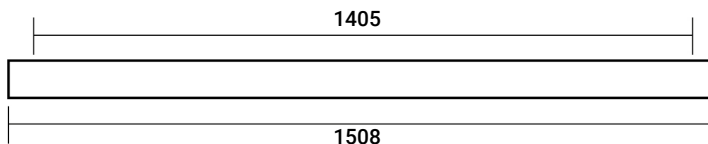

#### ESTANDAR/STANDARD



#### DISPONIBLE/AVAILABLE



#### CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
EBA215K0B	EVOLUTION/BR-M-32W 5080Lm/840 (DIR)	5,6	32W	5080	159 lm/W	4000
EBA316K3B	EVOLUTION/BR-L-40W 6350Lm/840 (DIR)	6,2	40W	6350	159 lm/W	4000

#### ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI    KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h    T.COLOR 3000K, 6000K    SET DE SUSPENSION/SUSPENSION SET  
REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP)    FLORON DECORATIVO/DECORATIVE CEILING BASE  
ELECTRIFICACION LC 3 POLOS/ELECTRIFICATION LC 3 PINES    ELECTRIFICACION LC 5 POLOS/ELECTRIFICATION LC 5 PINES

BAJO CONSULTA/UNDER REQUEST    DIFUSOR MICROPRISMATICO/MICROPRISMATIC DIFFUSER