




# SURFACE - SUSPENDED • LED



## SURFACE LED NT57/OPAL-LED

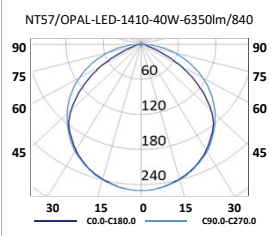

POSSIBILITY OF  
INDIVIDUAL ASSEMBLY  
AND FORMING  
CONTINUOUS LINES




NT57/OPAL-LED  
Aluminum profile(58x68)



Sensor

<b>Mounting</b>	Surface.
<b>Light source</b>	LED
<b>Optical system</b>	Opal diffuser. 4000K (standard). Option 3000K and 5000K.
<b>Light distribution</b>	Direct.
<b>Wiring</b>	Electronic control gear (EEI=A++). PF>0,95 TRIDONIC. Possibility of incorporating dimmable electronic control gear (DALI), presence sensor and light sensor and/or emergency Kit (1 hour).
<b>Material</b>	Body: Extruded aluminum profile. Diffuser: Opal thermoplastic material.
<b>Surface finish</b>	Body: White colour RAL 9003. Under request, RAL 9006, RAL 9005.
<b>Benefits</b>	LED luminaire with integrated electronic control gear. Technological guarantee Optimal lighting curve, homogeneous lighting throughout the projection area. Low consumption and high efficiency. Average service life >50.000 hours. Does not require maintenance. Careful with the environment, it does not contain mercury.

9000 Im 150 lm/W 80 Ra

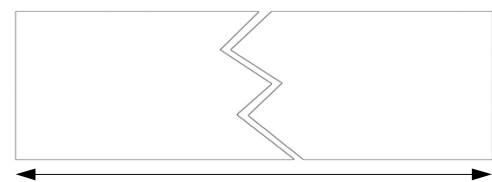

NT57/OPAL-LED-570: 570  
NT57/OPAL-LED-1130: 1130  
NT57/OPAL-LED-1410: 1410

220-240V 50-60Hz LED ECG EEI=A++ F IP40 AVAILABLE ECG DALI

CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED module + Driver lm/W	Colour temperature CCT (K)	Light sensor + pres. detector	DIMM DALI	Emergency MC-1
N57211K8B	LED NT57/OPAL-LED-570-16W-2540lm/840	(1,8)	2540	16	159	4000	✓	✓	✓
N57213K6B	LED NT57/OPAL-LED-570-24W-3600lm/840	(1,8)	3600	24	150	4000	✓	✓	✓
N57313K6B	LED NT57/OPAL-LED-1130-32W-5080lm/840	(2,8)	5080	32	159	4000	✓	✓	✓
N57317K2B	LED NT57/OPAL-LED-1130-48W-7200lm/840	(2,8)	7200	48	150	4000	✓	✓	✓
N57414K5B	LED NT57/OPAL-LED-1410-40W-6350lm/840	(3,3)	6350	40	159	4000	✓	✓	✓
N57419K0B	LED NT57/OPAL-LED-1410-60W-9000lm/840	(3,3)	9000	60	150	4000	✓	✓	✓

1562002 ACC. SUSPENSION SET (2 UNITS)  
Covers and joints included. Other measurements, under request.  
3000K and 5000K, under request.  
\* Light sensor + presence controls up to 10 luminaires.