





SURFACE - SUSPENDED • LED



POSSIBILITY OF INDIVIDUAL ASSEMBLY AND FORMING CONTINUOUS LINES

SURFACE-SUSPENDED NT50



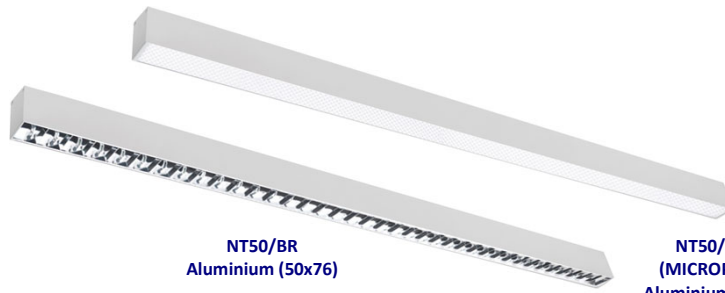
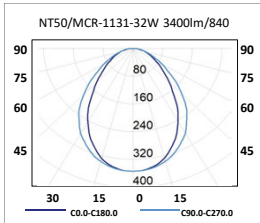


NT50/BR Aluminium (50x76)

NT50/MCR (MICROPRISM) Aluminium (50x76)

Mounting	Surface/suspended.
Light source	LED
Optical system	NT/50-BR: Bright double parabolic louvre NT/50-MCR: Microprismatic diffuser. 4000K (standard). Option 3000K and 5000K.
Light distribution	Direct.
Wiring	Electronic control gear (EEI=A++). PF>0,95 TRIDONIC. Possibility of incorporating dimmable electronic control gear (DALI), presence sensor and light sensor and/or emergency Kit (1 hour).
Material	Body: Extruded aluminum profile.
Surface finish	Body: Aluminium (RAL 9006).
Benefits	Included: Electrification for continuous lines assembly. LED luminaire with integrated electronic control gear. Technological guarantee. Optimal lighting curve, homogeneous lighting throughout the projection area. Low consumption and high efficiency. Average service life >50.000 hours. Does not require maintenance. Careful with the environment, it does not contain mercury.

4800 lm 120 lm/W >80 Ra

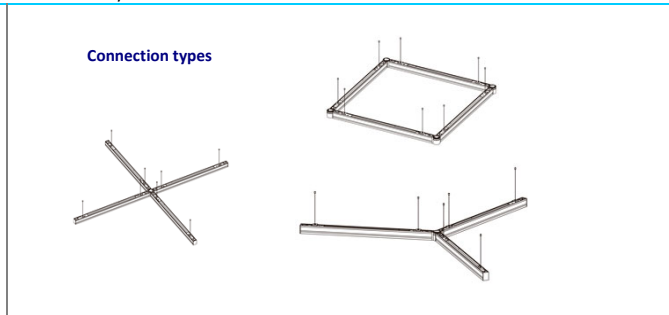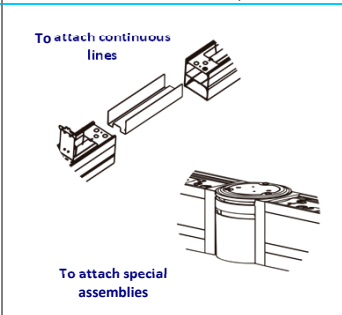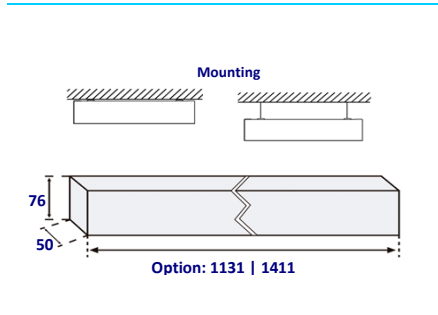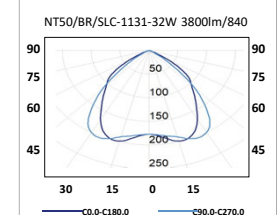

220-240V 50-60Hz LED ECG EEI=A++ F IP 20 AVAILABLE ECG DALI

CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED mod + Driver lm/W	Colour temperature CCT (K)	Light sensor + pres. detector	DIMM DALI	Emergency MC-1
N50343K4L	NT50/MCR/SLC-1131-32W 3400lm/840	(2,0)	3400	32	107	4000	✓	✓	✓
N50444K3L	NT50/MCR/SLC-1411-40W 4300lm/840	(2,5)	4300	40	108	4000	✓	✓	✓
N503B3K8L	NT50/BR/SLC-1131-32W 3800lm/840	(2,0)	3800	32	119	4000	✓	✓	✓
N504B4K8L	NT50/BR/SLC-1411-40W 4800lm/840	(2,5)	4800	40	120	4000	✓	✓	✓
15620002	ACC. SUSPENSION SET (2 UNITS)	-	-	-	-	-	-	-	-
156360100	ACC. LIGHT + PRESEN SENSOR (control up to 10 lumin.)	-	-	-	-	-	-	-	-
N50ULC	ACC. LC-UNION-NT/50	-	-	-	-	-	-	-	-
N50UA2X	ACC. ANGULAR-UNION-2X-NT50	-	-	-	-	-	-	-	-
N50UA3X	ACC. ANGULAR-UNION-3X-NT50	-	-	-	-	-	-	-	-
N50UA4X	ACC. ANGULAR-UNION-4X-NT50	-	-	-	-	-	-	-	-

Covers and joints included. 3000K and 5000K, under request.

more information in www.lux-may.com

LUX-MAY reserves the right to change product characteristics without notice.